


Certified quality for your safety...

Feit's fire dampers ensure silent airflow with their aerodynamic design. When the temperature exceeds 72°C, a thermal fuse cuts the power and releases the actuator spring, closing the damper immediately. The closure can be triggered by power loss or the thermal fuse. Once power is restored, the damper automatically reopens.




FFD 450x450x150 - V.24

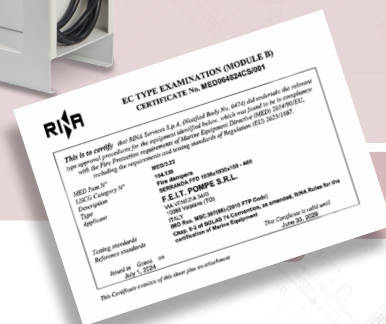

CHARACTERISTICS

- Frame in stainless steel AISI 304 or AISI 316, 2 mm thick
- Blades in stainless steel AISI 304 or AISI 316 with high-efficiency profile, overlapped 1.5 mm + 1.5 mm
- Operated via external levers in stainless steel AISI 304 or AISI 316
- Electric actuator 24 V-230 V-110 V

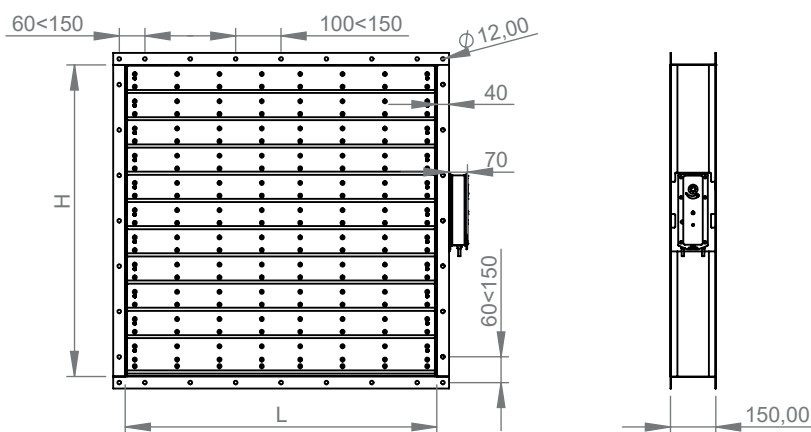

L	200	300	400	500	600	700	800	900	1000	1100
H	200	300	400	500	600	700	800	900	1000	
T	110	150								

Sito Web



Catalogo Generale



Feit Pompe S.r.l.

Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl


FEIT
1946
Evolving with you...



EMC 600x600x110 - M

CHARACTERISTICS

- U-frame in stainless steel l. 12/10
- Sheet steel profil section blades in stainless steel, with parallel movement by means of external levers located at the sides
- Stainless steel spindles
- Reset lever located on exterior at the side

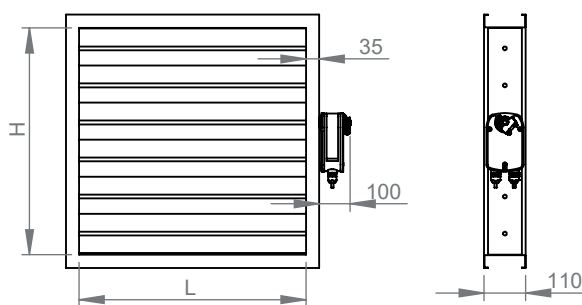

L	200	300	400	500	600	700	800	900	1000	1100
H	200	300	400	500	600	700	800	900	1000	
T	110	150								

Sito Web



Catalogo Generale



Feit Pompe S.r.l.
Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT
1946
Evolving with you...