



TSL 10/25



TSL 10/40

CHARACTERISTICS

- **Pump casing:** bronze
- **Impeller:** bronze
- **Diffuser:** bronze
- **Shaft:** AISI 316 stainless steel
- **Seal:** mechanical - carbon - ceramic - NBR
- **Motor:** 24 V D.C. 230V 1ph - 230/400V 3ph other version on request
- ATEX execution on request
- Capability of handling entrained liquids under continuous operating conditions
- Suction up to 7 m.
- Foot valve not required
- Quiet operation and minimal vibration
- Reversible flow execution on request

Sito Web



Catalogo Generale



Feit Pompe S.r.l.

Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl



1946
Evolving with you...

SELF PRIMING ELECTRIC PUMPS IN BRONZE


Series
TSL 10/15 - 10/51

APPLICATIONS

- extracting sea water, bilge
- water supply
- diesel transfer
- transferring soft water and sea water
- chain washing
- conditioning system
- fire-Fighting

DC EXECUTION

		l/min	5	10	20	25	40	45	60	75	100	125	130	150	175	200	225	240	265
	Kw	mc/h	0,3	0,6	1,2	1,5	2,4	2,7	3,6	4,5	6	7,5	7,8	9	10,5	12	13,5	14,4	15,9
TSL 10/15	0,25	H(m)	11	10	8	7	4	3											
TSL 10/20	0,37		15	14	12	11	8,5	7,8	5	2									
TSL 10/25	0,55				19	18	15	14	11	8,5	5								
TSL 10/40	0,75						19	18,2	16	14	10	6	5,3	2					
TSL 10/41	1,1								18	16	13	10	9,3	7	4				
TSL 10/50	1,5									18	16,5	14,7	14,2	12,5	10	7,5	4,5	3	

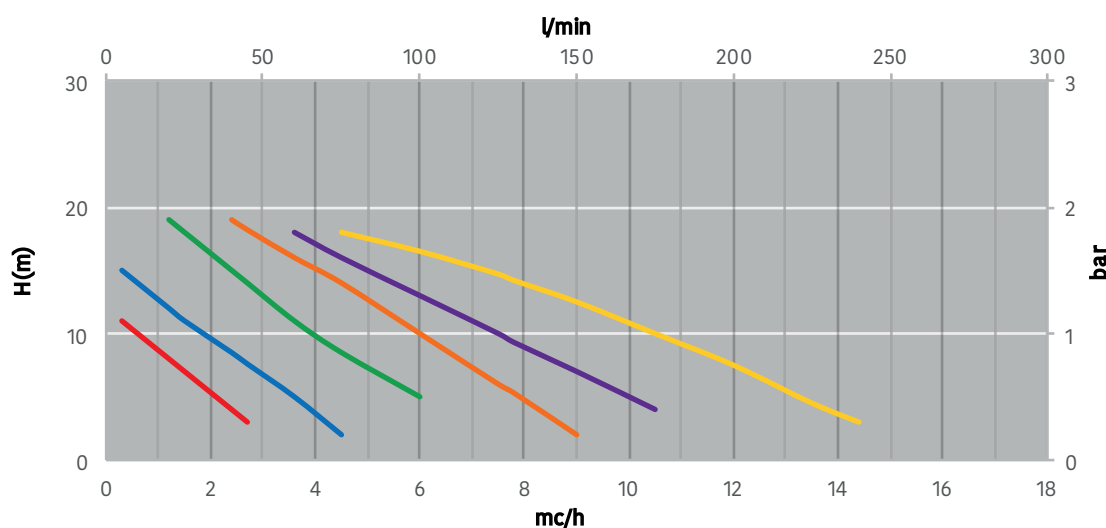


	VOLT	RPM
TSL 10/15	24V	2000
TSL 10/40	24V	2000

	VOLT	RPM
TSL 10/20	24V	2000
TSL 10/41	24V	2000

	VOLT	RPM
TSL 10/25	24V	2000
TSL 10/50	24V	2000

SELF PRIMING ELECTRIC PUMPS IN BRONZE

Series
TSL 10/15 - 10/51

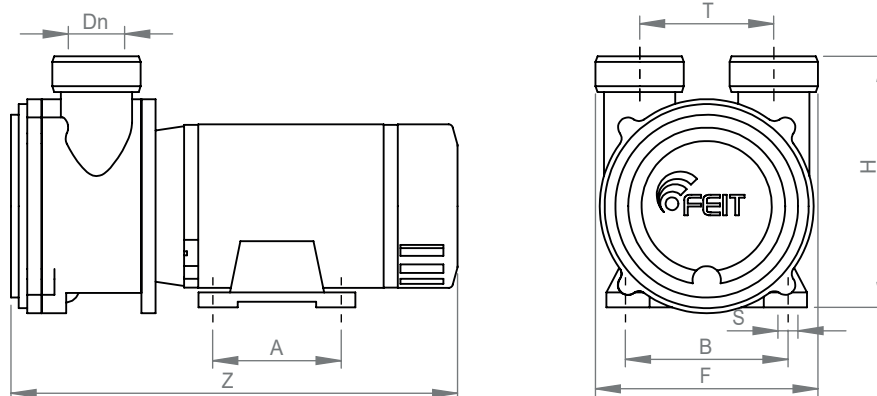

	Dn	A	B	F	H	S	T	Z	Kg
TSL 10/15	1"G	90	114	145	158	9	84	242	11
TSL 10/20	1"G	90	114	145	158	9	84	272	12
TSL 10/25	1"G	90	114	145	160	9	84	305	13
TSL 10/40	1 1/2"G	90	114	160	176	9	94	315	15
TSL 10/41	1 1/2"G	100	125	160	208	10	94	345	19
TSL 10/50	2"G	100	125	190	224	10	123	380	27


AC EXECUTION 50Hz

		l/min	5	10	20	25	40	45	60	75	100	125	130	150	175	200	225	240	265
	Kw	mc/h	0,3	0,6	1,2	1,5	2,4	2,7	3,6	4,5	6	7,5	7,8	9	10,5	12	13,5	14,4	15,9
TSL 10/15	0,25	H(m)	11	10	8	7	4	3											
TSL 10/20	0,37		15	14	12	11	8,5	7,6	5	2									
TSL 10/25	0,55				19	18	15	14	11	8,5	5								
TSL 10/40	0,75						19	18,2	16	14	10	6	5,3	2					
TSL 10/41	1,1								18	16	13	10	9,3	7	4				
TSL 10/50	1,5									18	16,5	14,7	14,2	12,5	10	7,5	4,5	3	
TSL 10/51	2,2								25	24	22	19,8	19,4	17,8	15	12	8,5	6,5	3

SELF PRIMING ELECTRIC PUMPS IN BRONZE

Series
TSL 10/15 - 10/51



AVANTAGE:FEIT

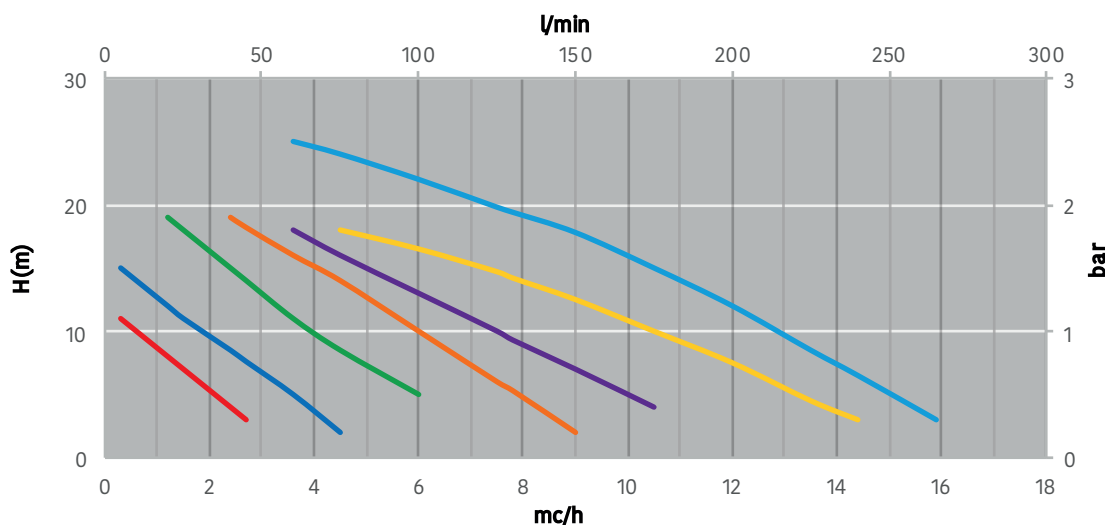

	VOLT	RPM
TSL 10/15	230/400 230m	1450
TSL 10/40	230/400 230m	1450
TSL 10/51	230/400 230m	1450

	VOLT	RPM
TSL 10/20	230/400 230m	1450
TSL 10/41	230/400 230m	1450

	VOLT	RPM
TSL 10/25	230/400 230m	1450
TSL 10/50	230/400 230m	1450

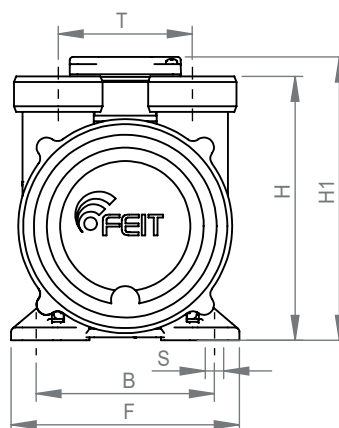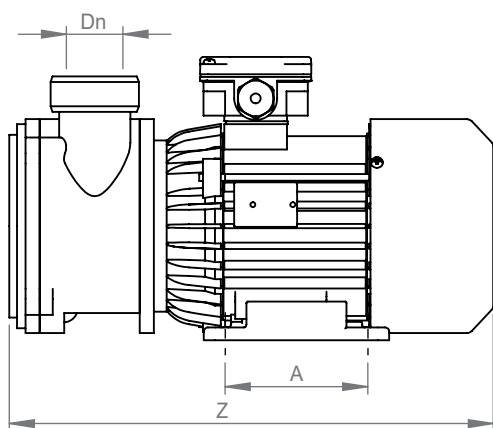

	Dn	A	B	F	H	H1	S	T	Z	Kg
TSL 10/15	1"G	90	112	142	168	178	7	84	272	10
TSL 10/20	1"G	90	112	142	168	178	7	84	312	11
TSL 10/25	1"G	100	125	142	170	180	10	84	320	12
TSL 10/40	1 1/2"G	100	125	142	185	198	10	94	340	15
TSL 10/41	1 1/2"G	100	140	170	195	220	10	94	360	18
TSL 10/50	2"G	125	140	190	210	230	10	123	440	30
TSL 10/51	2"G	140	160	200	235	250	12	123	487	40

Sito Web



Catalogo Generale



Feit Pompe S.r.l.

Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT
1946
Evolving with you...