



ELECTRIC-SELF PRIMING DIAPHRAGM PUMPS

Series
JDREX



JDREX S15



JDREX S40

Sito Web



Catalogo Generale



Feit Pompe S.r.l.
Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl



ELECTRIC-SELF PRIMING DIAPHRAGM PUMPS

Series
JDREX

AVANTAGE FABRIE.IT

	Kw	Volt	Amp. Max	Caratteristiche //performance		Raccordi
				lt.=litri/min	m=metri	Ports
JDREX S15	0,12	12	7	m. 0 - 2 - 4 - 6 - 8 - 10		1/2" gas
		24	4	lt. 18 - 16 - 15 - 14 - 13 - 12		f 20 mm
JDREX S40	0,20	12	12	m. 0 - 2 - 4 - 6 - 8 - 10		3/4" gas
		24	6	lt. 37 - 34 - 31 - 28 - 27 - 27		f 25 mm
JDREX S40	0,09	230	0,73	m. 0 - 2 - 4 - 6 - 8 - 10		3/4" gas
		230/400T	0,59/0,34	lt. 37 - 34 - 31 - 28 - 27 - 27		f 25 mm

CHARACTERISTICS


- Immediate self priming without pre filling the body of the pump
- Maximum reliability of operation, even after being inactive for lengthy periods
- No foot valves, no filter
- No maintenance required

- Quick installation
- All components of the pump are resistant to sea water corrosion
- Can run dry without any damage because they have no impeller seals or other delicate or fragile parts

APPLICATIONS

- extracting sea water, bilge
- transferring diesel
- water supply for trailers, boats, camper

- transferring soft water and sea water
- Sampling ecology

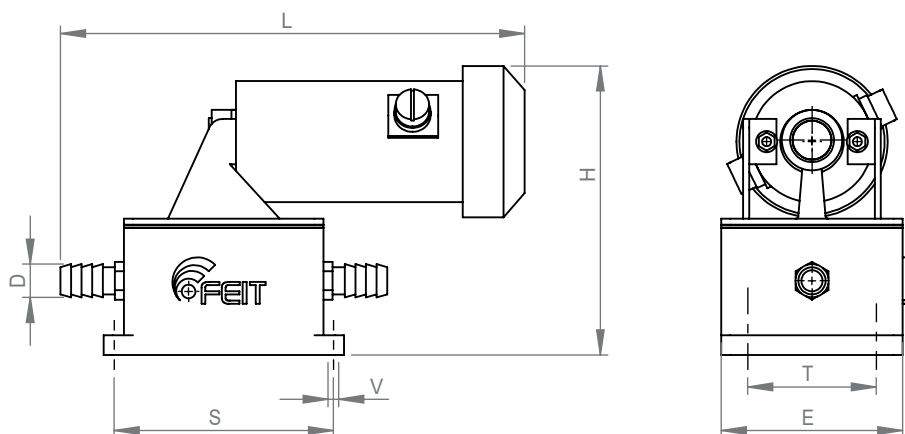

	L	H	E	S	T	V	D	Kg
JDREX S15	232	163	75	120	52	7	1/2" gas 20 mm	2,8
JDREX S40	290	201	116	144	85	7	3/4" gas 25 mm	4,2
JDREX S40	290	240	116	144	85	7	3/4" gas 25 mm	4

Sito Web

Catalogo Generale



Feit Pompe S.r.l.
Via Venezia, 34/g - 10088 - Volpiano (TO) - ITALIA
Tel: +39 (0)11 9884327 - info@feit.srl - feit.srl

FEIT
1946
Evolving with you...